



OZWOOD FLOORING



Stand on perfection

ozwoodaustralia.com.au



BFL Series Laminate

Product Name	BFL Laminate Flooring
Specification	1815 * 196 * 12 mm
	1845 * 235 * 12mm
Per Package	2.1344 square meter / 6 Panels
	2.16788 square meter / 5 Panels
Weights	21KG
Abrasion Level	AC5
Finish	Gloss / Matte
Locking System	Microbevel
Water Resistance	Up to 72 hours

Why choose BFL Laminate

A healthy Choice : Low
in Formaldehyde volume

Ultra Durable & Pet
Friendly

Sunlight Resistant & Wa-
ter Resistant up to 72
Hours

AC5 Compliant, Scratch
Resistant





Cambridge Oak

SPECIFICATION	1815*196*12mm
PRODUCT CODE	BFL8026
PER PACKAGE	2.1344 square meters, 6 Panels
WEIGHT	21 KG
PROFILE	Microbevel




Finer Iron Oak

SPECIFICATION	1845*235*12mm
PRODUCT CODE	BFL8804
PER PACKAGE	2.16788 square meters, 5 Panels
WEIGHT	21 KG
PROFILE	Microbevel



Lime Wash Oak

SPECIFICATION	1815*196*12mm
PRODUCT CODE	BFL8613
PER PACKAGE	2.1344 square meters, 6 Panels
WEIGHT	21 KG
PROFILE	Microbevel

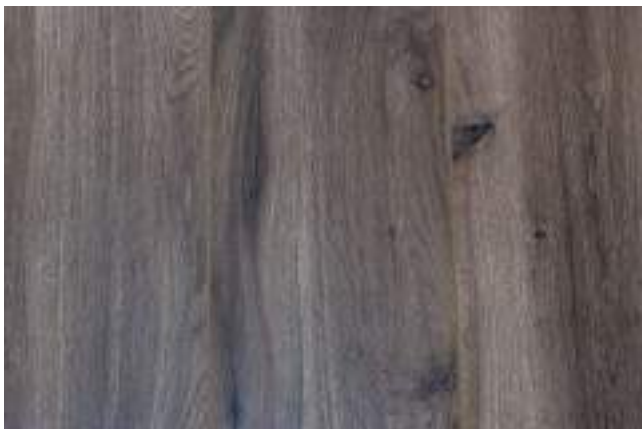

Grey Oak

SPECIFICATION	1815*196*12mm
PRODUCT CODE	BFL8117
PER PACKAGE	2.1344 square meters, 6 Panels
WEIGHT	21 KG
PROFILE	Microbevel



Jarrah

SPECIFICATION	1815*196*12mm
PRODUCT CODE	BFL8201
PER PACKAGE	2.1344 square meters, 6 Panels
WEIGHT	21 KG
PROFILE	Microbevel



White Oak

SPECIFICATION	1815*196*12mm
PRODUCT CODE	BFL8002
PER PACKAGE	2.1344 square meters, 6 Panels
WEIGHT	21 KG
PROFILE	Microbevel



Coastal Oak

SPECIFICATION	1815*196*12mm
PRODUCT CODE	BFL8096
PER PACKAGE	2.1344 square meters, 6 Panels
WEIGHT	21 KG
PROFILE	Microbevel



Blackbutt

SPECIFICATION	1815*196*12mm
PRODUCT CODE	BFL8604
PER PACKAGE	2.1344 square meters, 6 Panels
WEIGHT	21 KG
PROFILE	Microbevel

Formaldehyde Emission Test Certificate

Wednesday, October 3rd 2018

Supplier: OZ Wood (Australia) Pty Ltd (D2/290 Parramatta Road, Auburn, NSW, 2144).

Sample Description: Barock Laminate Floor - 12mm HDF Laminated Floorboard.

Date Tested: 02nd October 2018 (Tested by NATA Accreditation No: 15305 Laboratory).

Test Method: AS/NZS 4266.1:2017 section 17 "Standard Method for Formaldehyde Emission Testing - Desiccator Method".

Emission Data:

Green Building Council of Australia Green Star Office Design & As Built v1.1	Barock Laminate Floor - 12mm HDF Laminated Floorboard
Formaldehyde emission limit (Particleboard): E0 ≤0.5 mg/L	Formaldehyde emission rate: 0.33 mg/L
Formaldehyde Emission Class as per AS/NZS 1859.2:2017: E0 (Pass)	
	



Dr. Vyt Garnys
PhD, BSc(Hons) AIMM, ARACI, ISIAQ,
ACA, AIRAH, FMA
Managing Director and Principal Consultant



Nick Joy
BSc(Hons)
Consultant



Tuan Duong
B Eng. (Chem.)
Consultant

CV180965

Wet Swelling Resistance Analysis Report

Wednesday, January 16th, 2019

Supplier: Ozwood (Australia) Pty Ltd (D2/290 Parramatta Road, Auburn, NSW, 2144)

Sample Description: Barock Laminate Floorboard 12 mm

Date Tested: January 2019 (Tested by FORAY Laboratories – NATA Accreditation 1231)

Test Method: ISO 24336:2005 "Laminate floor coverings - Determination of thickness swelling after partial immersion in water".

Test Results:

Product Description	Surface Treatment	Results (%)	Compliance
Barock Laminate Floorboard 12mm	Decorative Laminate Top Face	8.8	Pass
			



Dr. Vyt Garnys
 PhD, BSc(Hons) AIMM, ARACI, ISIAQ
 ACA, AIRAH, FMA
 Managing Director and Principal Consultant



Tuan Duong
 BEng (Chemical)
 Consultant



Nick Joy
 BSc (Hons)
 Consultant

CV190106



Professional Scientific Solutions

Abrasion Resistance Test Certificate

Wednesday, 16th January 2019

Supplier: Ozwood (Australia) Pty Ltd (D2/290 Parramatta Road, Auburn, NSW, 2144)

Sample Description: Barock Laminate Floorboard

Date Tested: January 2019 (Tested by FORAY Laboratories – NATA Accreditation 1231)

Test Method: EN 13329: 2016 Annex E "Laminate Floor Coverings - Elements with a Surface Layer Based on Aminoplastic Thermosetting Resins - Specifications, requirements and test methods".

Test Data:

Barock Laminate Floorboard	Results (Cycles)
Initial Point	7,200
<i>Classification of the product in accordance with EN 13329 standard method: AC5 (Pass) (AC5 requires an initial point cycle of > 6000 cycles) – Level of use: Heavy commercial.</i>	
	

Dr. Vyt Garnys
PhD, BSc(Hons) AIMM, ARACI, ISIAQ
ACA, AIRAH, FMA
Managing Director and Principal Consultant

Nick Joy
BSc (Hons)
Consultant

Tuan Duong
B.Eng. (Chemical)
Consultant

CV190106



BFL - 8002 White Oak





BFL - 8026 Cambridge Oak





Immerse yourself in the refined elegance of premium laminate, designed with a stunning high-gloss finish that radiates luxury and sophistication. This sleek and contemporary surface brings a touch of modern opulence to any interior, transforming ordinary spaces into extraordinary showcases of style and class.





BFL - 8096 Coastal Oak





BFL - 8117 Grey Oak





BFL - 8117 Grey Oak





BFL - 8603 Spotted Gum





BFL - 8604 Blackbutt





BFL - 8604 Blackbutt





BFL - 8613 Lime Wash Oak





BFL - 8613 Lime Wash Oak



OZWOOD TIMBER FLOORING

Auburn 290 Paramatta Road auburn 2144

Castle Hill 8/9 Salisbury Rd, Castle Hill NSW
2154

Email : ozwoodaustralia@gmail.com

Phone: (02) 9648 0070 / (02) 9648 0040

Website: www.ozwoodaustralia.com.au

Instagram : www.instagram.com/ozwood_flooring

