
OZwood Timber Flooring

Hybrid SPC Flooring



AUSTRALIA

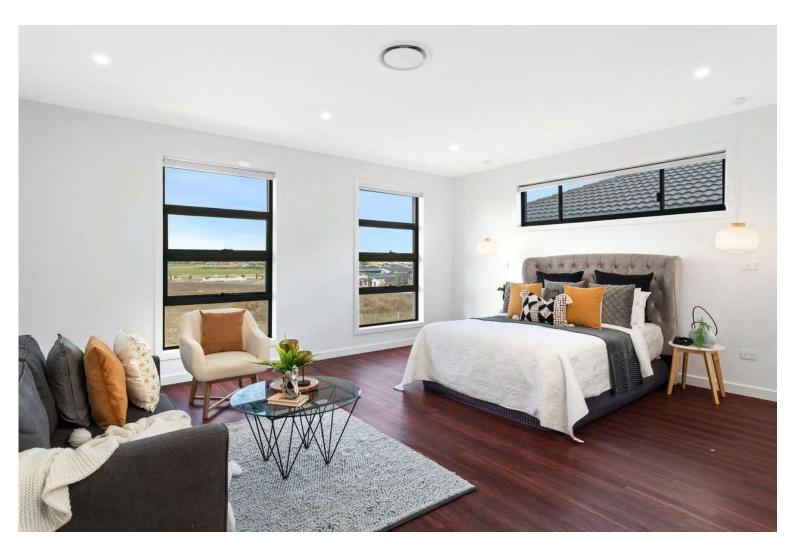

Hybrid SPC Flooring

Product Name	Hybrid 8mm
Specification	1530*183*8mm / 1630*230*8mm
Weights	21KG
Finish	Matte
Locking System	Click Lock


Technical Datasheet

Standard	Result
EN ISO 10874	Any Level
EN 13501	Bf1 - S1
EN 660-2	Class T
EN 24342	< 0.15mm
EN 23999	< 0.02mm
EN 23999	< 0.02mm
EN 1815	<2kv
AS 4586	R10, P3
EN 717-1	EO
ISO 717-2	Ln,w 50
EN 425	Pass
ISO 105 - B02	8
EN 12667 ISO 8302	0.027 (m2 k/w)
EN 12524	Suitable
EN 423	Very good
EN ISO 24343 - 1:2012	0.09mm
	EN ISO 10874 EN 13501 EN 660-2 EN 24342 EN 23999 EN 23999 EN 1815 AS 4586 EN 717-1 ISO 717-2 EN 425 ISO 105 - B02 EN 12667 ISO 8302 EN 12524 EN 423



The 8mm thickness of hybrid flooring provides an innovative blend of strength and style, making it an excellent choice for modern homes. Constructed with five layers, this flooring features a unique combination of stone and plastic, offering enhanced durability and stability. Its waterproof properties make it ideal for areas prone to moisture, such as kitchens, ensuring lasting performance in any environment.

Available in long and wide planks, hybrid flooring creates a spacious and contemporary aesthetic that suits a variety of design preferences. With a diverse selection of colors—from warm wood tones to sleek modern finishes—this flooring can seamlessly integrate into any interior style. The easy installation process further enhances its appeal, making it a practical yet stylish choice for homeowners seeking a balance of function and flair.

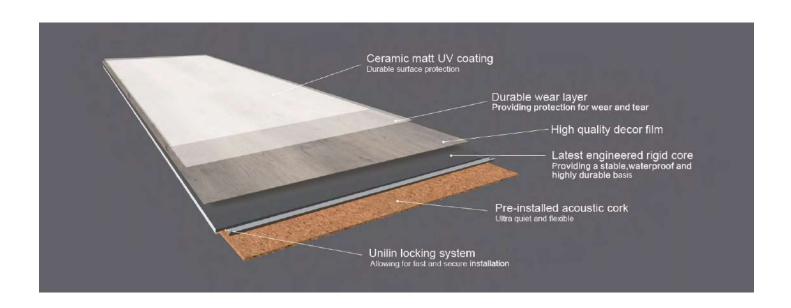













































OZwood Timber Flooring

Auburn / Castle Hill

Address:

290 Paramatta Road auburn 2144

8/9 Salisbury Rd, Castle Hill NSW 2154

Email: ozwoodaustralia@gmail.com

Phone: (02) 9648 0070 / (02) 9648 0040

Website: www.ozwoodaustralia.com.au

